

NPC6ASZDB



NETCONNECT® Cat 6A S/FTP RJ45 Patch Cord, LSZH

- High-performance patch cords exceeding industry standards supporting NETCONNECT channel specifications
- Standardized transparent, slim-line boots provides consistent patch cord appearance and supports highest density applications
- Colored clips are available to fit the transparent boot, eliminating the need of multiple colors for matching every jacket color
- Colored pull latch tabs are available for easier plug release handling from the modular jack

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America |
| Portfolio | NETCONNECT® |
| Product Type | Twisted pair patch cord |
| Product Series | NPC |
| Ordering Note | Cords < 1 m are valid elements for use in a channel or as an equipment interconnect but due to their limited length are not guaranteed to meet component compliance requirements that were developed to assess the quality of longer cords Cords > 1 m are authorized for use in channels and are an effective standalone method used to connect active devices |

General Specifications

| | |
|---------------------------------------|---|
| ANSI/TIA Category | 6A |
| Cable Type | S/FTP (shielded) |
| Conductor Type | Stranded |
| Interface, Connector A | RJ45 plug |
| Interface Feature, connector A | Standard |
| Interface, Connector B | RJ45 plug |
| Interface Feature, connector B | Standard |
| Jacket Color | Black Blue Green Orange Pink Purple Red Slate Violet White Yellow |
| Pairs, quantity | 4 |
| Transmission Standards | ANSI/TIA-568.2-D IEEE 802.3bt Type 4 ISO/IEC 11801 Class EA |
| Wiring | T568B |

Dimensions

| | |
|--|--------|
| Cable Assembly Length Range (m) | 1 – 30 |
|--|--------|

NPC6ASZDB

| | |
|---|-------------------|
| Cable Assembly Length Range (ft) | 1 – 100 |
| Cable Assembly Length Range (cm) | 15 – 999 |
| Cable Assembly Length Range (in) | 6 – 999 |
| Diameter Over Jacket | 5.84 mm 0.23 in |
| Compatible Conductor Gauge, stranded | 26 AWG |

Electrical Specifications

| | |
|------------------------------|-------|
| Safety Voltage Rating | 300 V |
|------------------------------|-------|

Ordering Tree

NPC -

Jacket Color

| | | |
|----|----|--------|
| 10 | BK | Black |
| | BL | Blue |
| | GN | Green |
| | GY | Gray |
| | OR | Orange |
| | PK | Pink |
| | RD | Red |
| | VT | Violet |
| | WT | White |
| | YL | Yellow |

UOM

| | | |
|----|---|------------|
| 11 | F | Foot |
| | M | Meter |
| | N | Inch |
| | C | Centimeter |

Length

| | |
|----|-----|
| 12 | XXX |
|----|-----|

Notes

- Cords > 1m are authorized for use in channels and are an effective standalone method used to connect active devices
- Cords < 1m are also valid elements for use in a channel or as an equipment interconnect but due to their limited length are not guaranteed to meet component compliance requirements that were developed to assess the quality of longer cords

Mechanical Specifications

| | |
|-------------------------------------|-----------|
| Plug Insertion Life, minimum | 750 times |
|-------------------------------------|-----------|

Environmental Specifications

| | |
|------------------------------|-------------------------------------|
| Operating Temperature | -20 °C to +60 °C (-4 °F to +140 °F) |
| Relative Humidity | Up to 93%, non-condensing |
| Environmental Space | Low Smoke Zero Halogen (LSZH) |
| Safety Standard | Anatel UL 1863 |

Packaging and Weights

| | |
|---------------------------|---|
| Packaging quantity | 1 |
|---------------------------|---|

Regulatory Compliance/Certifications

NPC6ASZDB

Agency

RCM



Classification

Compliant to electrical safety & telecommunications requirements

Included Products

2843032-3
MP-Boot-S/SL-AB

6-2111981-3
MP-6AS-B-1

- Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent
- Modular Plug Kit, category 6A, shielded, 8-position, 5.1 – 6.0 mm max cable jack OD, 100/bag

2843032-3 | MP-Boot-S/SL-AB



Modular Plug Shielded Slim-Line Boot for Category 6A/6 and Category 5e EMT Plugs, 4.7 to 6.0 mm, transparent

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Modular plug boot |

General Specifications

| | |
|-----------------------------|--|
| Boot Feature | Color-clip compatible Pull-tab compatible Shielded Slimline Snagless |
| Color | Clear |
| Compatible Plug Type | Cat 5e Cat 6 Cat 6A |

Dimensions

| | |
|---|-------------------|
| Compatible Cable Diameter, maximum | 6 mm 0.236 in |
| Compatible Cable Diameter, minimum | 4.7 mm 0.185 in |

Packaging and Weights


| | |
|---------------------------|---------------|
| Included | Strain relief |
| Packaging quantity | 100 |
| Packaging Type | Bag Box |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |



6-2111981-3 | MP-6AS-B-1

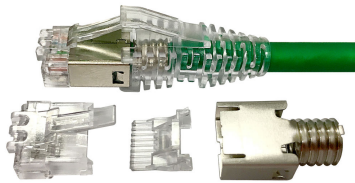

Modular Plug Kit, category 6A, shielded, 8-position, 5.1 – 6.0 mm max cable jack OD, 100/bag

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio

CommScope®

Product Type

Modular plug

General Specifications

ANSI/TIA Category

6A

Cable Type

Round, shielded

Conductor Type

Solid | Stranded

Interface

RJ45

Positions/Loaded Contacts

8/8

Termination Type

IDC

Dimensions

Compatible Cable Diameter, maximum

6 mm | 0.236 in

Compatible Cable Diameter, minimum

5.1 mm | 0.201 in

Compatible Insulated Conductor Diameter, maximum

1.09 mm | 0.043 in

Compatible Insulated Conductor Diameter, minimum

0.89 mm | 0.035 in

Contact Plating Thickness

1.27 µm

Compatible Conductor Gauge, solid

26–23 AWG

Compatible Conductor Gauge, stranded

26–23 AWG

Electrical Specifications

Insulation Resistance, minimum

500 mOhm

Material Specifications

| | |
|-------------------------------------|----------------------------|
| Contact Base Material | Phosphor Bronze |
| Contact Plating Material | Gold |
| Material Type | Glass filled polycarbonate |
| Plug Shield Base Material | Stainless steel |
| Plug Shield Plating Material | Nickel |

Mechanical Specifications

| | |
|-------------------------------------|-----------|
| Plug Insertion Life, minimum | 750 times |
|-------------------------------------|-----------|

Environmental Specifications

| | |
|------------------------------|--------------------------------------|
| Operating Temperature | -10 °C to +60 °C (+14 °F to +140 °F) |
| Safety Standard | UL 1863 |

Packaging and Weights

| | |
|---------------------------|--------------------|
| Packaging quantity | 100 |
| Packaging Type | Bag Box Carton |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |

